



## Dimension

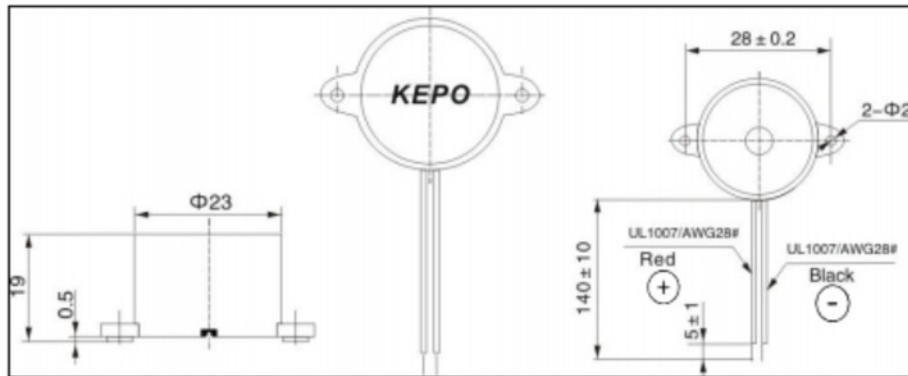

## Frequency response

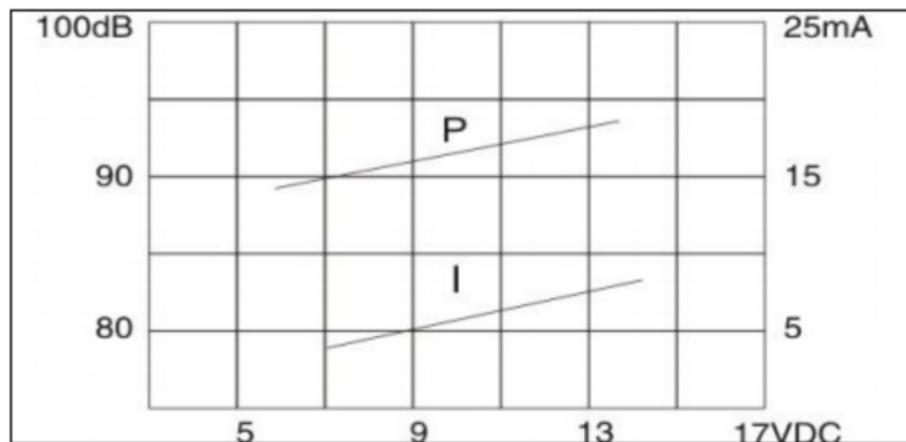

## Piezo Buzzer (internal drive)

### CA-P2319AI-903388W

#### Feature

- Available for reflow soldering
- Small size with high sound pressure level
- Application: mobile systems, control, PDA, pager., etc

#### Specification

Rated Voltage (Vp-p)	9VDC
Operating Voltage (Vp-p)	7VDC to 12VDC
Current Consumption (mA)	15mA at 9VDC
S.P.L. (dB Distance at 10cm)	88dB / 9VDC / 30cm
Resonance Frequency (Hz)	3.3kHz $\pm$ 0.5kHz
Operating Temperature Range ( $^{\circ}$ C)	-20 $^{\circ}$ C to +60 $^{\circ}$ C
Storage Temperature Range ( $^{\circ}$ C)	-30 $^{\circ}$ C to +70 $^{\circ}$ C