



Dimension

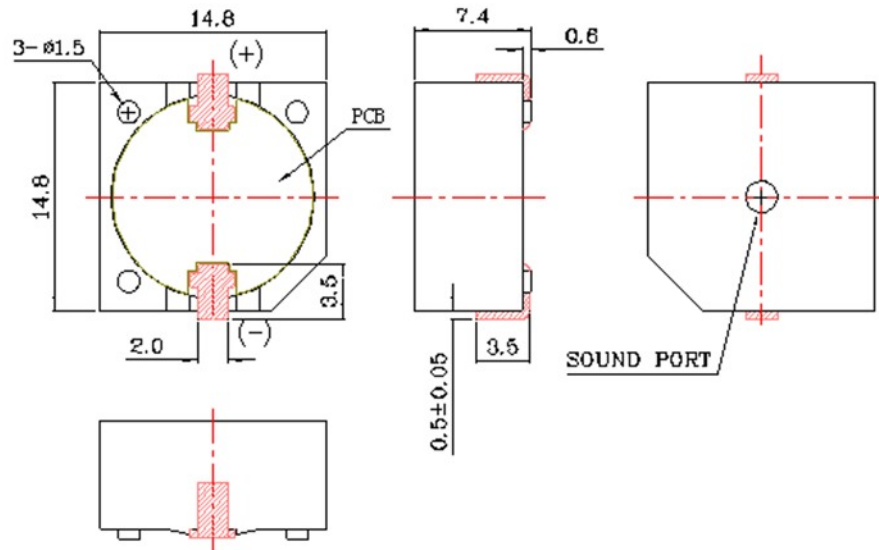

Frequency response

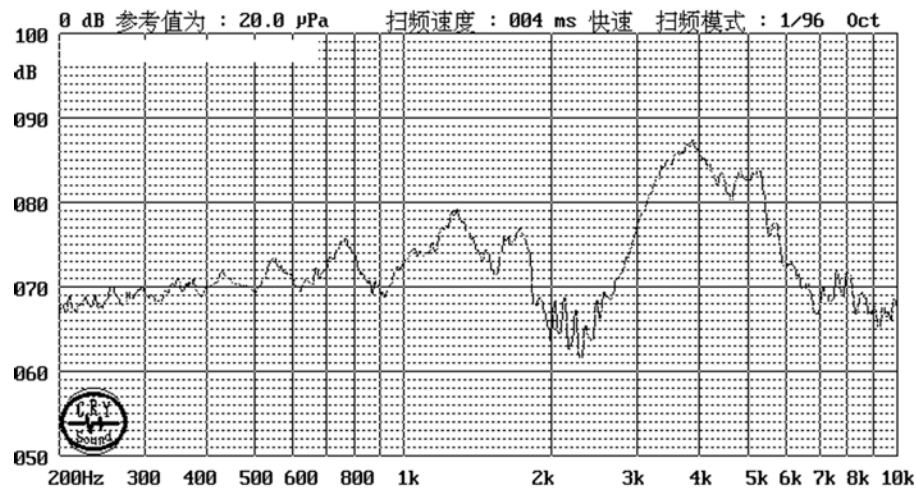

Piezo Buzzer (external drive)

CA-P151574A

Feature

- Available for reflow soldering
- Application: mobile systems, industrial control, etc

Specification

Rated Voltage (Vp-p)	5
Operating Voltage (Vp-p)	1 - 25
Current Consumption (mA)	3
Capacitance (pF) at 1kHz	15000 \pm 30%
S.P.L. (dB Distance at 10cm)	80
Resonance Frequency (Hz)	4,000 \pm 500
Operating Temperature Range ($^{\circ}$ C)	-20 ~ +70
Storage Temperature Range ($^{\circ}$ C)	-30 ~ +80