CA-P171750A

Piezo Buzzer

External

Features

High Sound Pressure Level. High temperature applicative.

RoHS Compliant

Electrical Characteristics

Rated Voltage (Vpp)	12
Operating Voltage (Vpp)	0~25
Current Consumption (mA)	2
S.P.L. (dB at 12V/10 cm)	min. 85
Resonance Frequency (Hz)	4000
Operating Temp. Range (°C)	-20 ~ +80
Storage Temp. Range (°C)	-30 ~ +85
Contact Type	SMD
ROHS-Compliant	Yes

Frequency Response

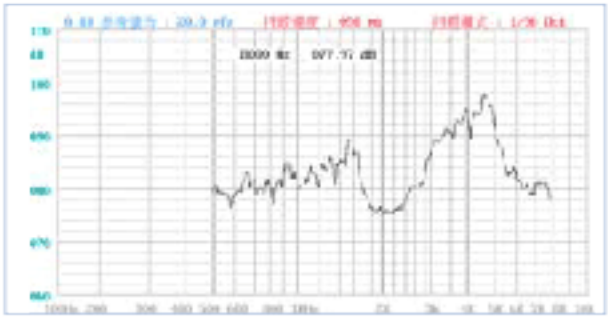

Packaging

Tray or Tape&Reel
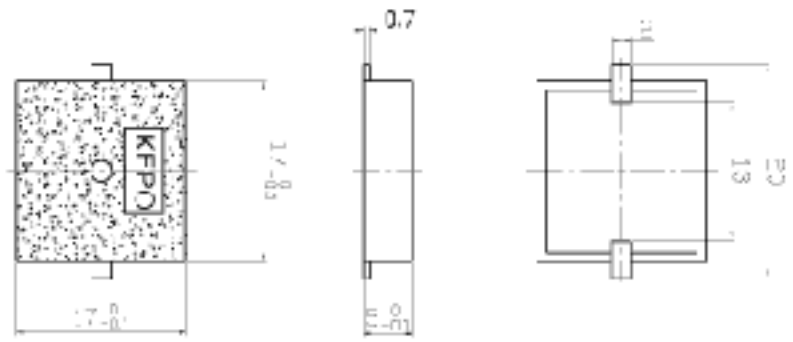
Mechanical Dimensions