Contitec Electronics Ltd. • Martin-Kollar-Str.4 • D-81829 München • Tel. +49 89 99 81 86 30 • Fax. +49 89 3219 50 75 • eMail: sales@contitec.com

Dimension

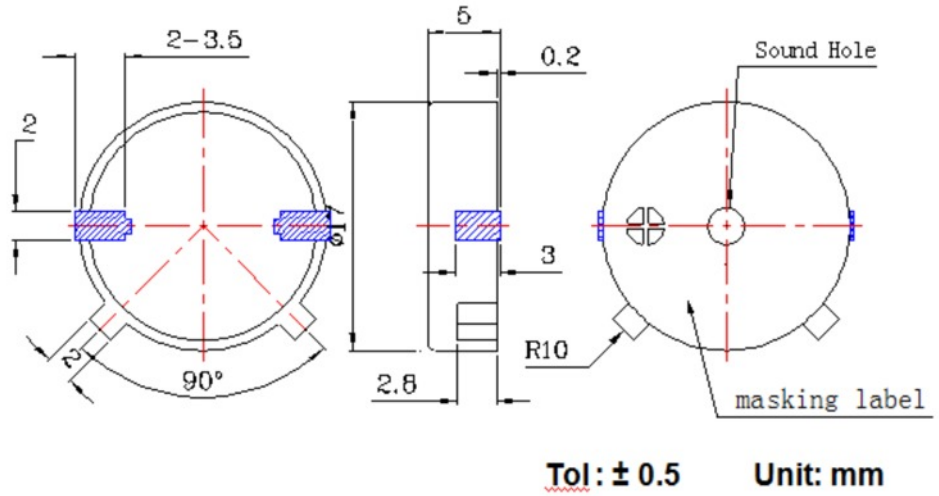

Frequency response

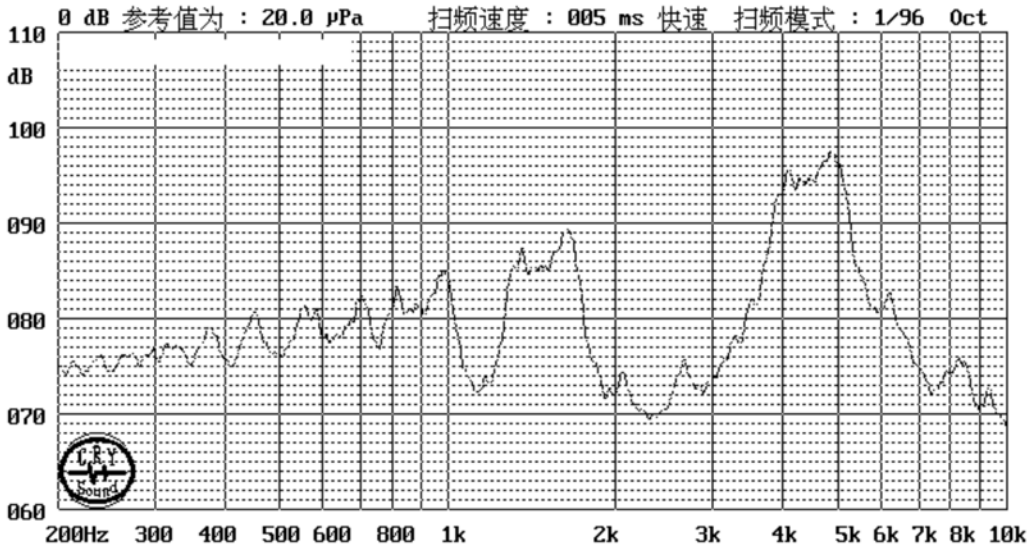

Piezo Buzzer (external drive)

CA-P1705A

Feature

- Available for reflow soldering
- High sound pressure level
- Application:Home security, industiell, building mgm

Specification

Operating Voltage (Vp-p)	1.0 - 30.0Vp-p
Current Consumption (mA)	≤5.0mA : at 24Vp-p
Capacitance (pF) at 1kHz	15000±30%pF at 120Hz
S.P.L. (dB Distance at 10cm)	≥90dB at 10cm, 4000Hz,24Vp-p
Resonance Frequency (Hz)	4000±500Hz
Operating Temperature Range (ºC)	-20C +70C
Storage Temperature Range (ºC)	-30C+80C