Contitec Electronics Ltd. • Martin-Kollar-Str.4 • D-81829 München • Tel. +49 89 99 81 86 30 • Fax. +49 89 3219 50 75 • eMail: sales@contitec.com

Dimension

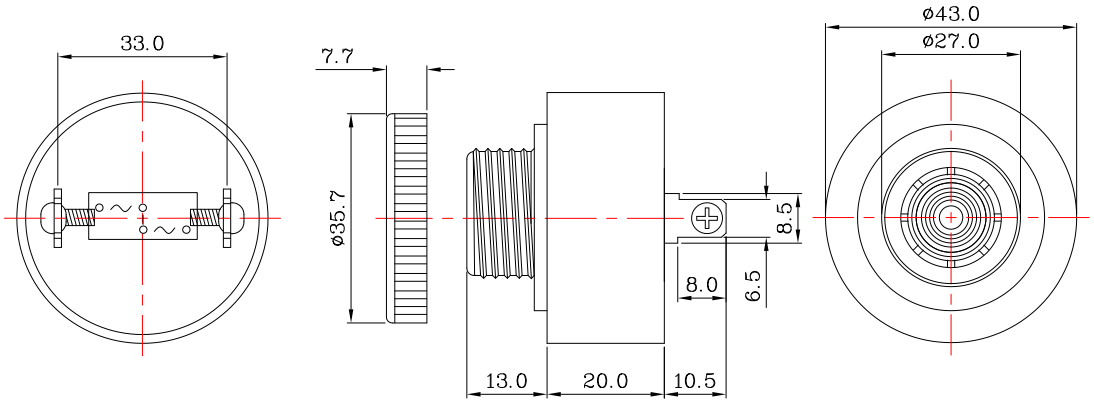

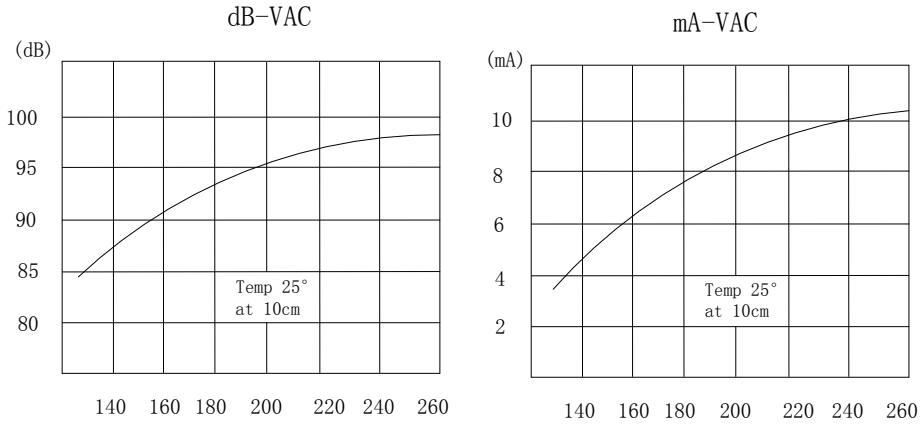

Piezo Buzzer (internal drive)

CA-P4333A-230A29T

Feature

- Available with slow pulse, fast pulse, continuous ton
- Application: industrial

Specification

Rated Voltage	230VAC
Operating Voltage	200 ~ 240VAC
Current Consumption	≤ 30 mA
S.P.L. (dB at 10cm) typical	100
Resonance Frequency (Hz)	2900 ± 500
Operating Temperature Range (°C)	-20 ~ +70
Storage Temperature Range (°C)	-30 ~ + 80
Material (UL-94 HB listed, high heat black)	ABS