




### Dimension

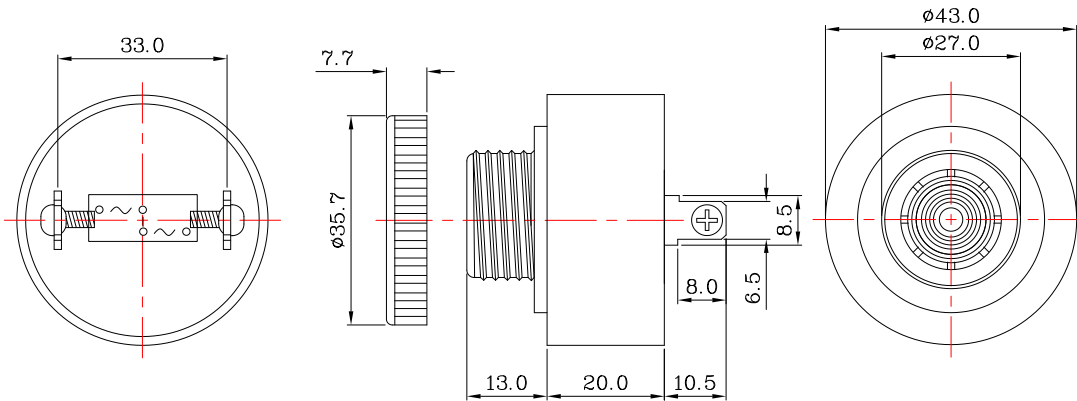

## Piezo Buzzer (internal drive)

### CA-P4333AI-230A29

#### Feature

- Available with slow pulse, fast pulse, continuous ton
- Application: industrial

#### Specification

Rated Voltage	230VAC
Operating Voltage	200 ~ 240VAC
Current Consumption	≤ 30 mA
S.P.L. ( dB at 10cm) typical	100
Resonance Frequency (Hz)	2900 ± 500
Operating Temperature Range (°C)	-20 ~ +70
Storage Temperature Range (°C)	-30 ~ + 80
Material (UL-94 HB listed, high heat black)	ABS

