BRUSHLESS DC FAN



FEATURES


- 17 x 17 x 5 mm miniature fan.
- Proprietary impeller design provides high air flow and quiet operation. (0.01m³/min, 5dB(A) at 7000rpm)



APPLICATIONS

- Video equipments
- Information systems
- Telecommunication equipments

■ PART NUMBER DESIGNATION

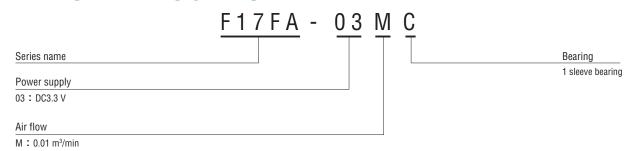

eMail: sales@contitec.com

■ LIST OF PART NUMBERS

Power supply	Part number
DC3.3 V	F17FA-03MC

* Verify the above part numbers when placing orders.

F17FA


MINIATURE BRUSHLESS DC FAN MOTORS

STANDARD SPECIFICATIONS

Item	F17FA-03MC
Rated voltage	DC3.3 V
Voltage range	3.1 ~ 3.5 V
Rated current	0.07 A
Rotating speed	7000 min ⁻¹
Air flow	0.01 m³/min
Static pressure	6 Pa
Noise	5 dB (A)
Use environment	0 ~ +60 °C (35 ~ 85 %RH)
Storage environment	–10 ~ +70 °C (35 ~ 85 %RH)
Net weight	Approx. 1.5 g

 $^{**}The specifications above are typical values measured on the conditions of no-loading running with rated voltage in the circumstances of 25 °C <math>\pm$ 2 °C, 35~ 85 %RH. Please contact us if you would like to check the specifications in different circumstances.


AIR FLOW PERFORMANCE CURVES



* Data in our measuring instrument

OUTLINE DIMENSIONS

(Unit: mm)



Sales & Support by Contitec

eMail: sales@contitec.com