

Picture




Hifi mini Speaker

■ CA-SM3210A

Features:

full-frequency and signal speaker solutions for dashboards, signals, e-call, and hi-fi.

Frequency response

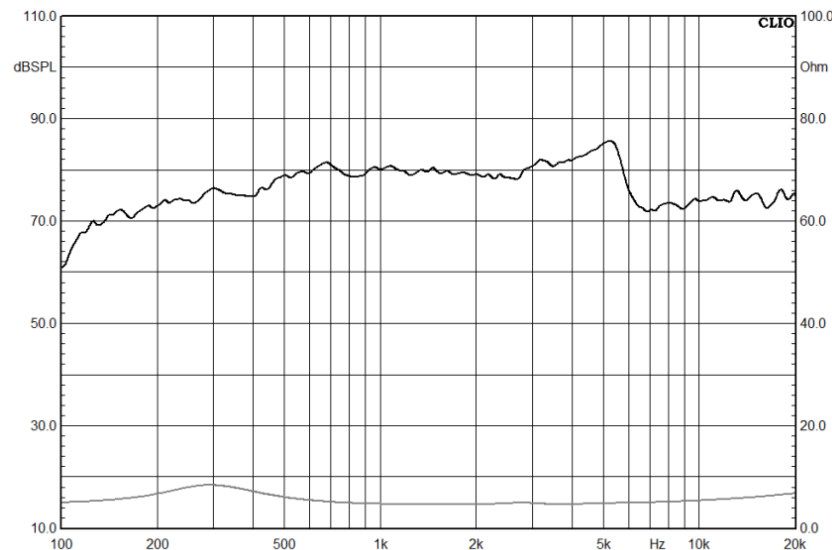

Specification

Dimension (mm)	Ø32x10
Rated Input Power (W)	1,0
Max. Input Power (W)	1,5
Impedance (Ω)	4 Ω±15% (1V at 1000Hz)
S.P.L. (dB)	80±3dB @ 1w/1maverage at 0.6,0.8,1.0,1.2kHz
Frequency Range (Hz)	300 ~ 20.000
Reson. Frequency Fo (Hz)	300 Hz±20%
Operating Temperature (C)	-40 to + 85
Storage Temperature (C)	-40 to + 90